



PaxScan 2520DX-I imagers provide industry leading image quality for industrial and security applications. Varex Imaging’s amorphous silicon-based detectors are the benchmark for radiography in industrial, medical and dental applications.

Amorphous silicon brings key advantages unmatched by other technologies, including:

- radiation hardness > 1MRad
- widest input energy range
- immunity from single photon events in the substrate
- excellent low dose performance

Varex Imaging’s extensive industrial product line allows the OEM to easily integrate multiple panel sizes. The Virtual CP software interface is common across all the panels and the entire product line is offered with Gigabit Ethernet.

### **Technical Specifications**

Receptor Type	Amorphous Silicon
Conversion Screen	Direct Deposit CsI, DRZ Plus
Pixel Area Total	19.5 x 24.4 cm (7.68 x 9.6 in.)
Pixel Matrix Total	1,536 x 1,920 (1 x 1) 768 x 960 (2 x 2)
Pixel Pitch	127 μm <sup>2</sup>
Limiting Resolution	3.94 lp/mm
MTF, X-Ray	>48% @ 1 lp/mm (1 x 1), CsI screen
Energy Range	40 - 225 kVp
Fill Factor	57%
Image Capture	Gigabit Ethernet
Scan Method	Progressive
A/D Conversion	16-bit
Frame Rate	12.5 fps (1 x 1) 30 fps (2 x 2)
Data Output	Gigabit Ethernet
Exposure Control	Opto Coupled, External Sync, Expose OK

### **Power**

Power Dissipation	12 Watts nominal power consumption 11 to 35V input range, 15V typical
Power Supply/Mains	100 - 240 VAC, 47 - 63 Hz

### **Software**

The software release includes ViVA™, a basic application for image acquisition and viewing on an end-user workstation running Microsoft® Windows™. The developer’s software package includes a “Virtual Command Processor” software interface that performs detector calibration, detector set-up, image acquisition, and image corrections. ViVA™ includes file type translators for .viv, .raw, .jpg, and .bmp file formats.

### **Mechanical**

Weight	9.2 lbs. (4.3 kg)
Housing Material	Aluminum
Sensor Protection Material	Carbon fiber plate (2.5 mm thick) and aluminum

### **Environmental**

Temperature Range - Operating	10°C to 35°C (max.) (measured on the back cover)
(Ambient) - Storage	-20°C to +70°C
Humidity - Operating & Storage (non-condensing)	10 to 90%
Atmospheric Pressure - Operational & Storage	70 kPa to 106 kPa





### **Regulatory**

Canada	CAN/CSA-C22.2 No. 61010-1
U.S.	UL 61010-1
Europe	EN 61326-1:2013

®PaxScan is a Registered Trademark of Varex Imaging Corporation

Dimensions are for reference only

Dimensions are in mm

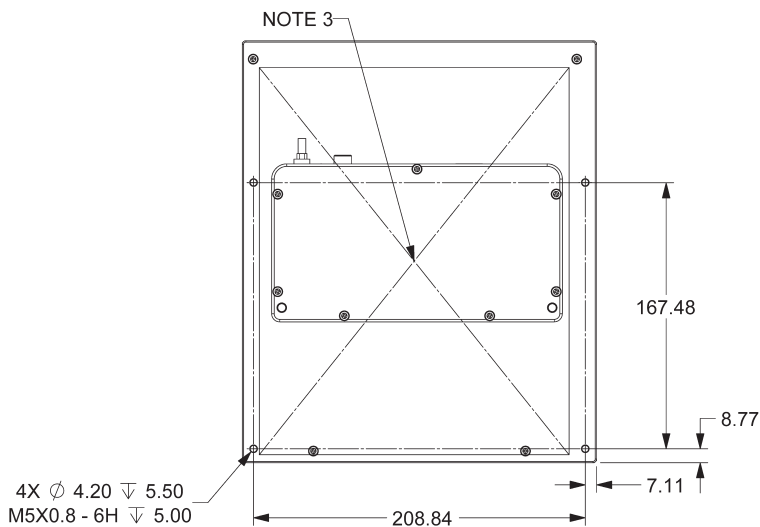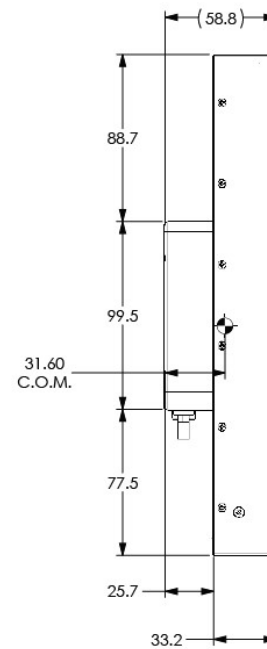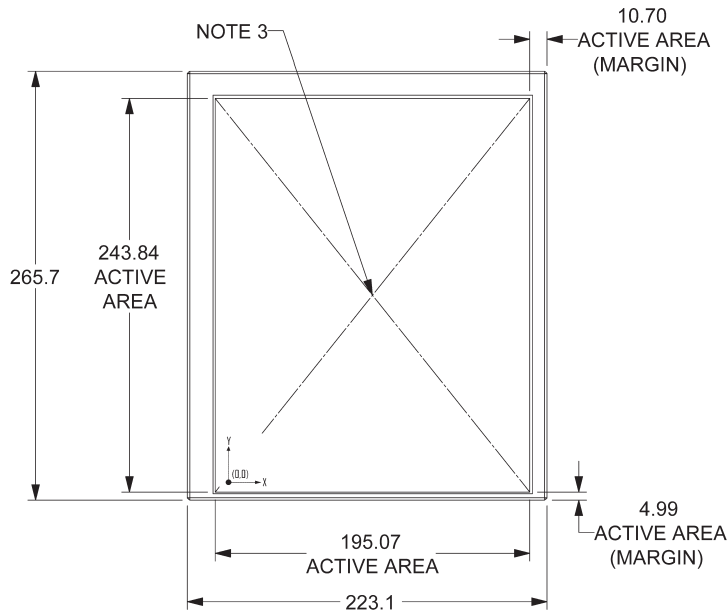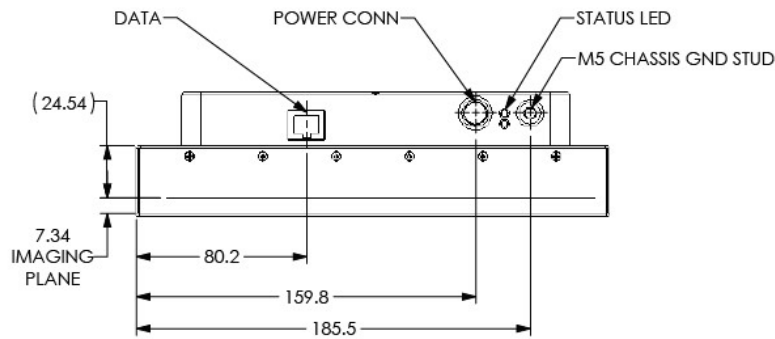

Notes:


1. Top surface of Active Area
3. Indicates center of Active Area
4. Input Voltage = 12 to 32V
5. Max Amps = .52A @ 24V
6. Power Dissipation = 12.48W

Detector Characterization Charts in accordance with ASTM E2597-14 Standard Practice for the Manufacturing Characterization of Digital Detector Arrays


NOTE: SMTR, CS and Lag quality numbers all improve with higher frame rate.

Full Resolution - 2pF Gain setting

**Aluminum 6061**

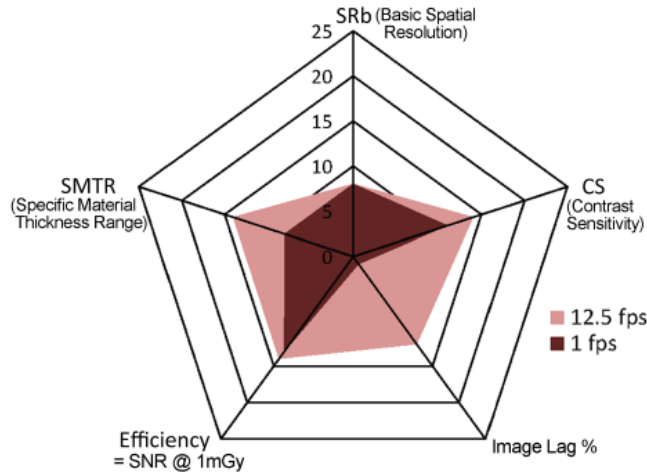

**Inconel 718**

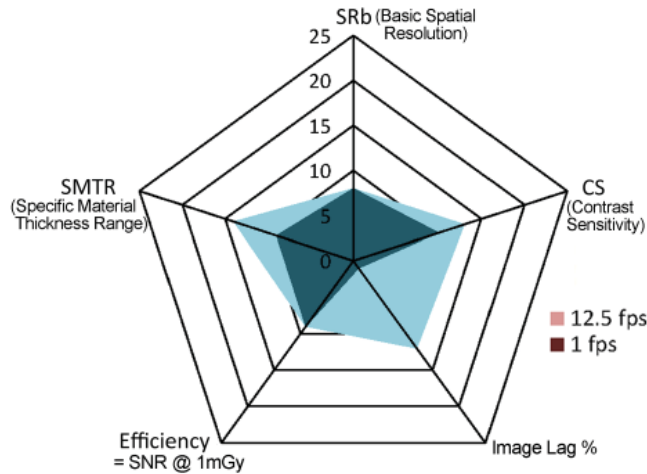

**Titanium 6Al4V**

